


<p>Selection Guide Instructions:</p> <ol style="list-style-type: none"> Determine Module Series by matching dimensions to size range (left column, below). Select number of modules to mount (move across chart) Note - TPM Configuration block, which includes the pole size, layout and price. Determine Top of Pole Mount part number to order using Ordering Guidelines Block (to the right). Refer to Options page on back for more details. <p>Prices subject to change without notice.</p>	<p>Ordering Guideline TPM8-D-SHARP-NE170UC1-HWV-AA</p>  <p>*Important: Include complete module part # as listed on module manufacturer's specification sheet</p>	<p>TPM Configuration Key</p> <p>6"SCH40 ← Size of Schedule or Schedule 80 rigid steel pipe.</p> <p>4h x 2w-L ← Array Layout and Module Orientation (P=Portrait, L=Landscape)</p> <p>\$1,415 ← TPM Mounting Hardware List Price</p> <p>Based on standard design – 90 mph, Exposure C.</p>
---	---	--

		Number of Modules												
MODULE SIZE RANGE (W x L)	DPW MODULE Series	1	2	3	4	6	8	9	10	12	14	15	16	18
19-23" x 35-44"	A	2"SCH40 1hx1w-P \$165	2"SCH40 1hx2w-P \$175	2.5"SCH40 1hx3w-P \$350	3"SCH40 1hx4w-P \$370	4"SCH40 2hx3w-P \$570	4"SCH40 2hx4w-P \$680	n/a	6"SCH40 5hx2w-L \$1,050	6"SCH40 6hx2w-L \$1,235	6"SCH40 7hx2w-L \$1,365	n/a	6"SCH80 8hx2w-L \$1,590	n/a
20-26" x 39-50"	B	2"SCH40 1hx1w-P \$170	2"SCH40 1hx2w-P \$205	2.5"SCH40 1hx3w-P \$360	3"SCH40 1hx4w-P \$390	4"SCH40 2hx3w-P \$630	4"SCH80 2hx4w-P \$715	n/a	6"SCH40 5hx2w-L \$1,110	6"SCH40 6hx2w-L \$1,300	6"SCH80 7hx2w-L \$1,435	n/a	6"SCH80 8hx2w-L \$1,665	n/a
22-27" x 56-63"	C	2"SCH40 1hx1w-P \$175	2.5"SCH40 1hx2w-P \$320	3"SCH40 1hx3w-P \$370	4"SCH40 1hx4w-P \$560	4"SCH80 2hx3w-P \$730	6"SCH40 4hx2w-L \$1,015	6"SCH40 3hx3w-P \$1,250	6"SCH40 5hx2w-L \$1,300	6"SCH80 6hx2w-L \$1,430	8"SCH40 7hx2w-L \$1,890	n/a	8"SCH80 8hx2w-L \$2,290	8"SCH80 3hx6w-P \$2,495
31-33" x 60-67"	D	2"SCH40 1hx1w-P \$180	3"SCH40 1hx2w-P \$370	4"SCH40 1hx3w-P \$540	4"SCH80 2hx2w-P \$655	6"SCH40 2hx3w-P \$1,055	6"SCH40 4hx2w-L \$1,415	6"SCH80 3hx3w-P \$1,680	8"SCH40 5hx2w-L \$1,935	8"SCH40 3hx4w-P \$2,335	8"SCH80 7hx2w-L \$2,570	8"SCH80 3hx5w-P \$2,780	8"SCH80 4hx4w-P \$3,085	8"SCH80 6hx3w-L \$3,510
38-40" x 51-53"	E	2"SCH40 1hx1w-P \$185	3"SCH40 1hx2w-P \$395	4"SCH40 1hx3w-P \$565	4"SCH40 2hx2w-P \$690	6"SCH40 3hx2w-L \$560	6"SCH40 4hx2w-L \$1,485	6"SCH80 3hx3w-P \$1,760	8"SCH40 5hx2w-L \$2,035	8"SCH40 3hx4w-P \$2,460	8"SCH80 7hx2w-L \$2,700	8"SCH80 5hx3w-L \$2,900	8"SCH80 4hx4w-P \$3,235	8"SCH80** 6hx3w-L \$3,685
38-42" x 58-61"	F	2"SCH80 1hx1w-P \$190	3"SCH40 1hx2w-P \$410	4"SCH40 1hx3w-P \$595	4"SCH80 2hx2w-P \$730	6"SCH40 3hx2w-L \$1,160	6"SCH80 4hx2w-L \$1,560	6"SCH80 3hx3w-P \$1,840	8"SCH40 5hx2w-L \$2,130	8"SCH80 3hx4w-P \$2,565	8"SCH80*** 7hx2w-L \$2,700	8"SCH80 5hx3w-L \$3,050	8"SCH80** 4hx4w-P \$3,535	8"SCH80**** 6hx3w-L \$3,900
37-42" x 61-67"	G	2"SCH80 1hx1w-P \$195	3"SCH40 1hx2w-P \$425	4"SCH40 1hx3w-P \$630	4"SCH80 2hx2w-P \$760	6"SCH40 3hx2w-L \$1,305	6"SCH80 4hx2w-L \$1,710	8"SCH40 3hx3w-P \$1,900	8"SCH40 5hx2w-L \$2,435	8"SCH80 3hx4w-P \$2,660	8"SCH80*** 7hx2w-L \$3,495	8"SCH80 5hx3w-L \$3,805	n/a	n/a
38-40" x 77-78"	H	2.5"SCH40 1hx1w-P \$215	3"SCH80 1hx2w-P \$475	4"SCH40 1hx3w-P \$710	6"SCH40 2hx2w-P \$855	6"SCH40 3hx2w-L \$1,465	8"SCH40 4hx2w-L \$1,920	8"SCH80 3hx3w-P \$2,130	8"SCH80 5hx2w-L \$2,730	8"SCH80 3hx4w-P \$2,980	n/a	n/a	n/a	n/a

ALL PIPE RECOMMENDATIONS CONFORM TO ASCE 7-05, IBC2006, AND ARE BASED ON 90MPH, EXPOSURE C, 65-DEGREE MAX TILT, 12" MAX. FRONT EDGE GROUND CLEARANCE, EXCEPT FOR THOSE NOTED: * 6" MAX. FRONT EDGE GROUND CLEARANCE ** 55-DEGREE MAX. TILT ***MAX. FRONT EDGE GROUND CLEARANCE AND 55-DEGREE MAX. TILT **** 45-DEGREE MAX. TILT

Top-of-Pole Mounting Options Selection and Pricing Guide

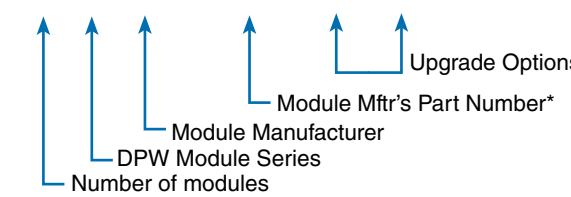


Instructions: Add Options to the end of TPM part number in the order listed below
 Add Option pricing to base TPM list price

Part Suffix	Description	Part Suffix	Description
HWV	High Wind Version	8IN	Mounting sleeve upgrade to 8" steel pipe
SSH	Stainless Steel Hardware for Rack Assembly	6IN	Mounting sleeve upgrade to 6" steel pipe
TRH	Tamper Resistant Hardware for Module Mounting	4IN	Mounting sleeve upgrade to 4" steel pipe
HGS	Hot-dip Galvanized Steel Components	3IN	Mounting sleeve upgrade to 3" steel pipe
PCS	Powder Coated Steel Components	2.5IN	Mounting sleeve upgrade to 2.5" steel pipe
PCA	Powder Coated Aluminum Components		
AA	Anodized Aluminum Components		

Ordering Guideline

TPM8-D-SHARP-NE170UC1-HWV-AA

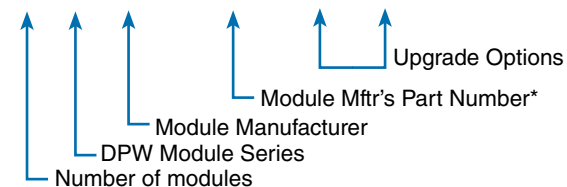

***Important:** Include complete module part # as listed on module manufacturer's specification sheet

1. High Wind Version for 130 MPH, Class C Wind Zone - add 25% to price

2. Finish Upgrade		Price Adder
HGS	Hot-dip Galvanized Steel Components	60%
PCS	Powder Coated Steel Components	25%
PCA	Powder Coated Aluminum Components	20%
AA	Anodized Aluminum Components	20%

3. Tamper Resistant Hardware for Module Mounting

# of Mod	1	2	3	4	6	8	9	10	12	14	15	16	18
Add	\$20	\$25	\$30	\$35	\$45	\$55	\$60	\$65	\$75	\$85	\$90	\$95	\$105

TRH Package includes stainless steel pin-in-hex machine screws with nylon-insert lock nuts and matching hex-key

4. Stainless Steel Hardware for Rack Assembly

# of Mod	1	2	3	4	6	8	9	10	12	14	15	16	18
Add	\$10	\$25	\$35	\$40	\$60	\$80	\$90	\$95	\$130	\$140	\$150	\$165	\$185

SSH Package includes 100% stainless hardware for the structure

5. Mounting Sleeve Upgrade

Standard Mounting Pole		2.5"	3"	4"	6"	8"
	2"		\$25	\$30	\$40	\$105
2.5"		-	\$25	\$35	\$100	\$260
3"		-	-	\$30	\$95	\$250
4"		-	-	-	\$90	\$245
6"		-	-	-	-	\$220



4000-B Vassar Drive NE
 Albuquerque, NM 87107 USA

Telephone: 800.260.3792
 Fax: 505.889.3548
 Web Site: www.DPWSolar.com
 E-mail: info@power-fab.com