




SSW-R1

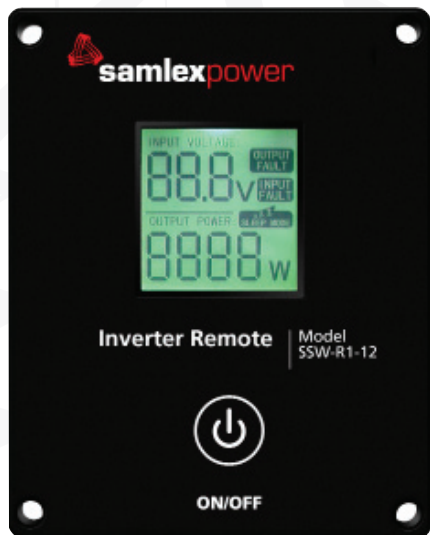

Inverter Remote Control
Pure Sine Wave

Model
SSW-R1-12

Design Features

- LCD Display
- Included for free with the following Samlex Pure Sine Wave Inverters:
 - SSW-1000-12A
 - SSW-1500-12A
 - SSW-2000-12A
- 10 ft of cable with 8P Modular Connector (RJ45)
- LCD indications:
 - Input voltage
 - Output power
 - Input fault
 - Output fault
 - ZZZ sleep mode

Free LCD Remote Control included with every SSW-1000-12A, SSW-1500-12A & SSW-2000-12A

Use the control panel for remote operation and store your inverter out of sight batteries!



2 YEAR WARRANTY

MODEL NO.	SSW-R1-12
APPLICABLE MODELS OF INVERTERS	SSW-1000-12A SSW-1500-12A SSW-2000-12A
RECEPTACLE FOR CONNECTING CABLE	8P8C (8 Position, 8 Conductor) Modular Receptacle (RJ-45)
CONNECTING CABLE TYPE	8 Conductor, Cat 5 Networking Cable
CONNECTING CABLE, LENGTH	3 meters
CONNECTING CABLE, CONNECTORS	8P8C (8 Position, 8 Conductor) Modular Plugs (RJ-45) on both ends
DIMENSIONS (WITHOUT CABLE),MM (L x W x H)	102 x 82 x 35
DIMENSIONS (WITHOUT CABLE), IN (L x W x H)	4.0 x 3.2 x 1.4
WEIGHT (WITHOUT CABLE), KG	0.056
WEIGHT (WITHOUT CABLE), LB	0.12

NOTE: Specifications are subject to change without notice